
(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau





(10) International Publication Number WO 2004/005078 A1

(51) International Patent Classification7:

B60R 16/02

(21) International Application Number:

PCT/TR2002/000027

(22) International Filing Date:

3 July 2002 (03.07.2002)

(25) Filing Language:

English

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): KUNT ELEKTRONIK SANAYI VE TICARET A.S. [TR/TR]; Ikitelli Organize Sanayi ve Bölgesi, Turgut Özal Cad. No:216, Ikitelli, 34670 Istanbul (TR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KUTLUGIL. Mehmet [TR/TR]; Ikitelli Organize Sanayi Bölgesi, Turgut Özal Cad. No:216, Ikitelli, 34670 Istanbul (TR).
- (74) Agent: ANKARA PATENT BUREAU LTD.; Sehit Adem Yavuz Sok. No:8/22, Kizilay, 06440 Ankara (TR).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRONIC SWITCHING MODULE

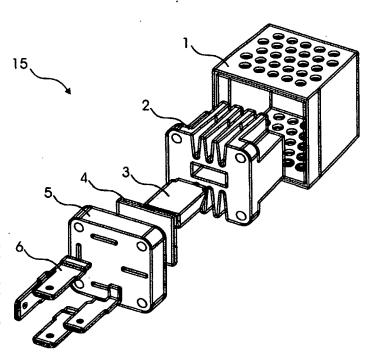

(57) Abstract: The present invention relates to an electronic switching module that can directly be mounted without any modifications, instead of the electromagnetic DC relays used in various vehicles. The electronic switching module (15) consists of a plastic casing (1) protecting said module against the external environmental conditions, an aluminium block (2) preventing over-heating of the electronic circuit, a semiconductor switching element transistor (3), a printed circuit card (4) on which the electronic circuit elements are arranged, a cover (5) wherein said printed circuit card is placed and the contacts (6) to provide the connection to the power circuit.